


Rollenketten Amerikanische Bauart - DIN 8188-1 (1.März 1996)

ketTEC

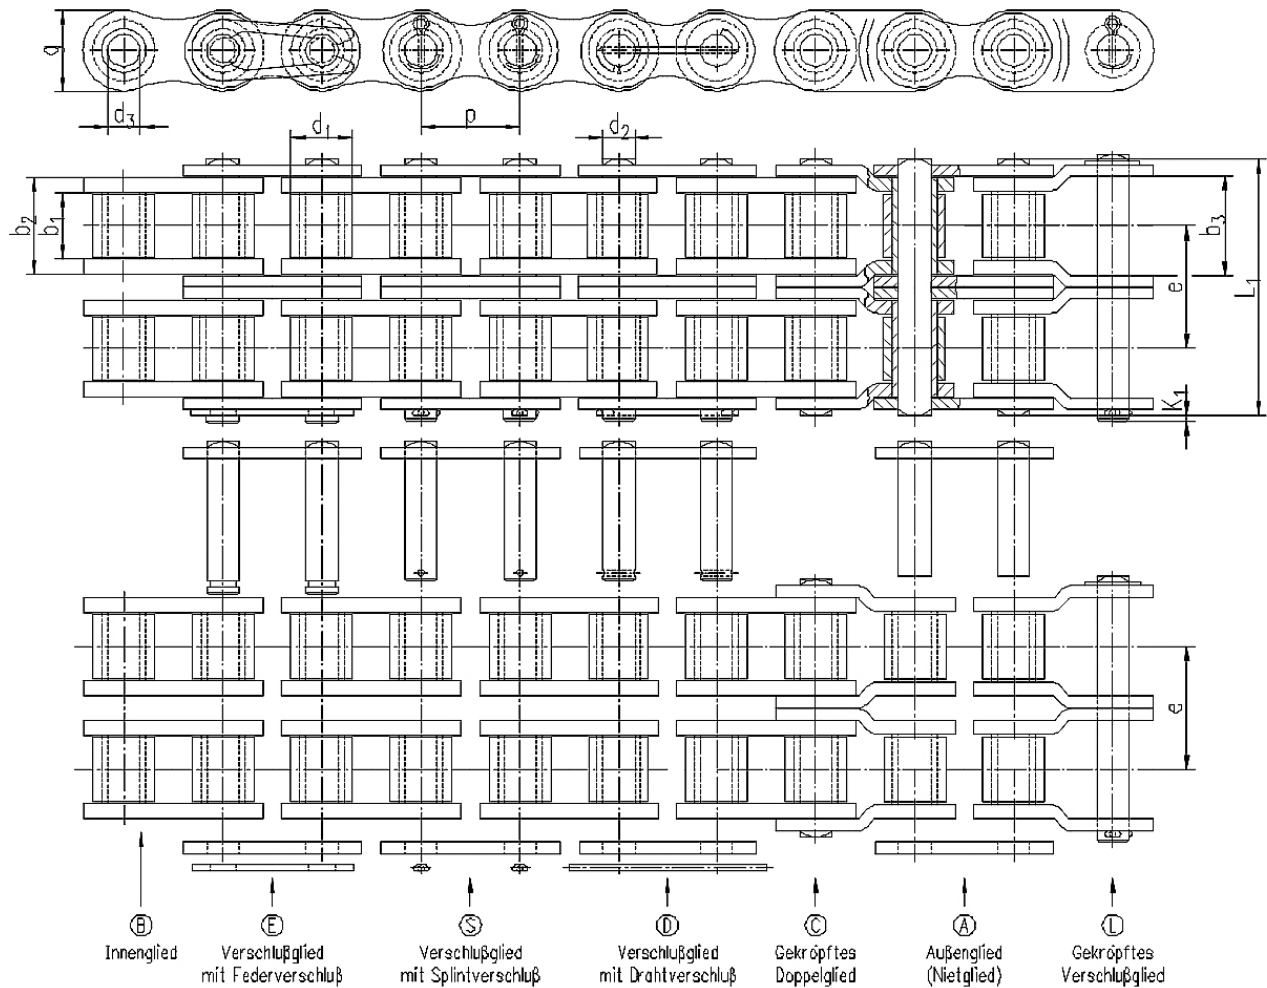

DIN	p		b ₁ min. [mm]	b ₂ max. [mm]	b ₃ min. [mm]	d ₁ max. [mm]	d ₂ max. [mm]	d ₃ min. [mm]	e [mm]	g max. [mm]	K ₁ max. [mm]	L ₁ max. [mm]	Bruchkraft min. [N]	Gewicht ca. kg/m	
	[mm]	[inch]													
04C-2	25	6,35	1/4"	3,18	4,80	4,85	3,30	2,31	2,34	6,40	6,00	2,5		7.000	-
06C-2	35	9,525	3/8"	4,68	7,47	7,52	5,08	3,28	3,63	10,13	9,10	3,3		15.800	0,7
08A-2	40	12,70	1/2"	7,85	11,15	11,28	7,95	3,96	4,01	14,38	12,00	3,9	32,3	28.200	1,2
10A-2	50	15,875	5/8"	9,40	13,80	13,93	10,16	5,08	5,13	18,11	15,00	4,1	39,9	44.400	1,9
12A-2	60	19,05	3/4"	12,57	17,70	17,85	11,91	5,94	5,99	22,78	18,00	18,4	49,8	63.600	2,9
16A-2	80	25,40	1"	15,75	22,50	22,70	15,88	7,92	7,96	29,29	24,10	5,4	62,7	113.400	5,0
20A-2	100	31,75	1 1/4"	18,90	27,40	27,60	19,05	9,53	9,59	35,67	30,10	8,1	77,0	17.700	7,3
24A-2	120	38,10	1 1/2"	25,22	35,30	35,60	22,23	11,10	11,17	45,44	36,20	6,6	96,3	254.000	10,9
28A-2	140	44,45	1 3/4"	25,22	37,00	37,30	25,40	12,70	12,77	48,87	42,20	7,4	103,0	344.800	14,4
32A-2	160	50,80	2	31,55	45,00	45,30	28,58	14,27	14,35	58,55	48,20	7,9	124,0	453.600	19,1
40A-2	200	63,50	2 1/2"	37,85	54,70	55,00	39,68	19,84	19,92	71,55	60,30	10,0	151,0	707.600	32,0
48A-2	240	76,20	3"	47,35	67,50	68,00	47,63	23,80	23,90	87,83	73,20	10,0	183,0	1.020.600	44,0